

BiMAX 5N


570-590W

**N-type TOPCon
Bifacial Dual Glass
Solar Module**

Quality Guarantee

25-year Materials Warranty

30-year Power Warranty

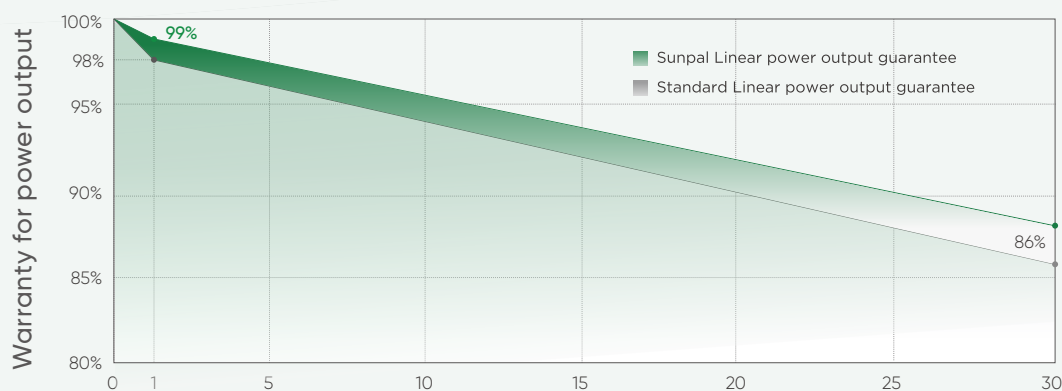

87.4%

22.84%^{Max}

Module Eff.

0~+5W

Positive Tolerance

Complete System and Product Certifications

IEC61215/IEC61730

ISO 9001: Quality Management System

ISO 14001: Environmental Management System

ISO 45001: Occupational Health and Safety Management System



* Specifications subject to technical changes and tests. Sunpal Solar reserves the right of interpretation.

Positive power tolerance (0~+5W) guaranteed

High module conversion efficiency (up to 22.84%)

Slower power degradation enabled by Low LID Mono TOPCON technology: first year <1%, 0.40% year 2-30

Solid PID resistance ensured by solar cell process optimization and careful module BOM selection

Reduced resistive loss with lower operating current

Higher energy yield with lower operating temperature

Reduced hot spot risk with optimized electrical design and lower operating current



Sunpal Power Co., Ltd.

Add: No. 398 Ganquan Road, Hefei, Anhui, China.


Email: info@sunpalsolar.com

Tel: +86 551 6586 5992

Web: www.sunpalsolar.com

MECHANICAL CHARACTERISTICS

Solar Cells	N-type Mono
No. of Cells	144 (6x24)
Dimensions	2278 x 1134 x 30mm
Weight	31.5kg
Front / Back Glass	2.0mm coated semi-tempered glass
Frame	Anodized aluminium alloy
Junction Box	Ip68 rated (3 by pass diodes)
	4.0mm ²
Output Cables	250mm (+) / 350mm (-)
	Length can be customized
Connectors	Mc4 compatible
Mechanical load test	Front 5400Pa / Rear 2400Pa

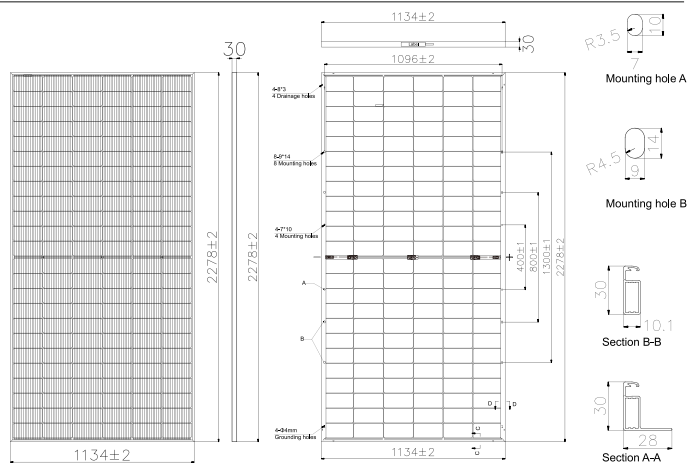

ELECTRICAL PARAMETERS

POWER CLASS	570		575		580		585		590	
	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT	STC	NMOT
Maximum power (Pmax)	570W	429W	575W	433W	580W	437W	585W	441W	590W	445W
Open Circuit Voltage (Voc)	51.41V	48.69V	51.55V	48.82V	51.68V	48.96V	51.81V	49.09V	51.94V	49.23V
Short Circuit Current (Isc)	14.15A	11.41A	14.22A	11.47A	14.29A	11.53A	14.36A	11.59A	14.43A	11.65A
Voltage at Maximum power (Vmpp)	42.41V	39.36V	42.56V	39.51V	42.71V	39.66V	42.86V	39.80V	43.00V	39.95V
Current Maximum Power (Impp)	13.44A	10.90A	13.51A	10.96A	13.58A	11.02A	13.65A	11.08A	13.72A	11.14A
MODULE EFFICIENCY (%)	22.07%		22.26%		22.45%		22.65%		22.84%	

STC: Irradiance 1000W/m², cell temperature 25°C, AM1.5G NMOT: Irradiance 800W/m², ambient temperature 20°C, wind speed 1m/s, AM1.5G

BIFACIAL OUTPUT-REAR SIDE POWER GAIN



5%	Maximum power (Pmax)	599W	604W	609W	614W	620W
	Module Efficiency STC (%)	23.17%	23.37%	23.57%	23.78%	23.98%
15%	Maximum power (Pmax)	656W	661W	667W	673W	679W
	Module Efficiency STC (%)	25.37%	25.60%	25.82%	26.04%	26.27%
25%	Maximum Power (Pmax)	713W	719W	725W	731W	738W
	Module Efficiency STC (%)	27.58%	27.82%	28.07%	28.31%	28.55%

PACKING CONFIGURATION

Container	20'GP	40'HQ
Pieces per pallet	37	37
Pallets per container	5	20
Pieces per container	185	740

I-V CURVE

575ND/I-V

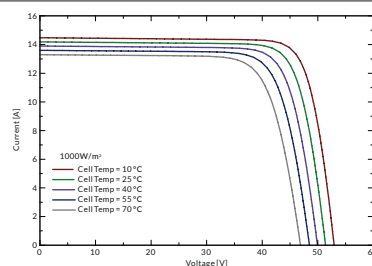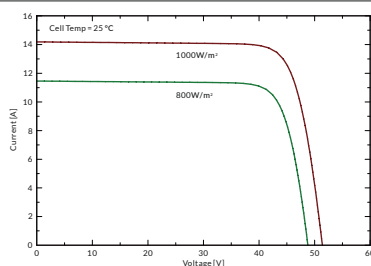

OPERATING CHARACTERISTICS


Operating Module Temperature	-40°C to +85°C
Maximum System Voltage	1500 DC (IEC)
Maximum Series Fuse Rating	30A
Power Tolerance	0/+5W

TEMPERATURE CHARACTERISTICS

Nominal Operating Temperature (NMOT)	45±2°C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	+0.045%/°C

Three Phase Hybrid Inverter

SUN-5/6/8/10/12K-SG04LP3-EU

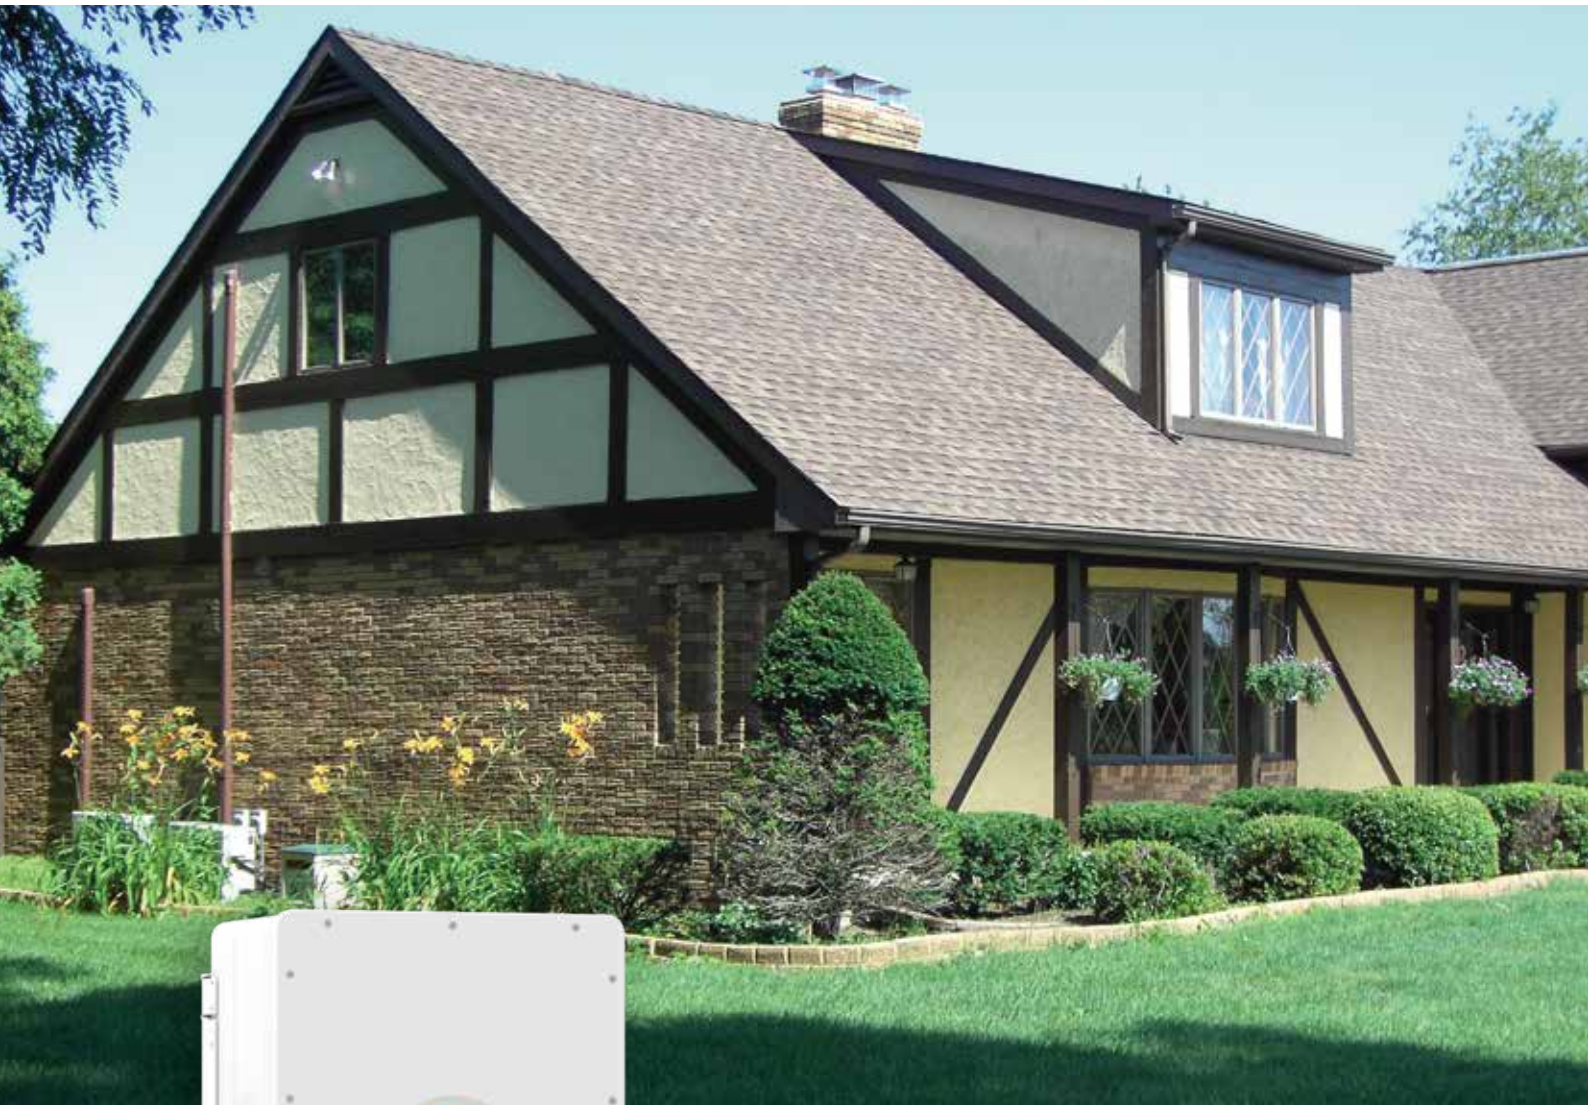

100

100% unbalanced output, max. output up to 50% rated power for each phase



AC couple to retrofit existing solar system

10

Max. 10 pcs parallel for on-grid and off-grid operation; Support multiple batteries parallel

240

Max. charging/discharging current of 240A

48

48V low voltage battery, transformer isolation design

6

6 time periods for battery charging/discharging



Support storing energy from diesel generator

Deye

Stock Code: 605117.SH


Model	SUN-5K -SG04LP3-EU	SUN-6K -SG04LP3-EU	SUN-8K -SG04LP3-EU	SUN-10K -SG04LP3-EU	SUN-12K -SG04LP3-EU
Battery Input Data					
Battery Type	Lead-acid or Lithium-ion				
Battery Voltage Range (V)	40-60				
Max. Charging Current (A)	120	150	190	210	240
Max. Discharging Current (A)	120	150	190	210	240
Charging Strategy for Li-ion Battery	Self-adaption to BMS				
Number of Battery Input	1				
PV String Input Data					
Max. PV Access Power (W)	10000	12000	16000	20000	24000
Max. PV Input Power (W)	7500	9000	12000	15000	18000
Max. PV Input Voltage (V)	800				
Start-up Voltage (V)	160				
MPPT Voltage Range (V)	200-650				
Rated PV Input Voltage (V)	550				
Max. Operating PV Input Current (A)	13+13			26+13	
Max. Input Short-Circuit Current (A)	17+17			34+17	
No. of MPP Trackers/ No. of Strings MPP Tracker	2/1+1			2/2+1	
AC Input/Output Data					
Rated AC Input/Output Active Power (W)	5000	6000	8000	10000	12000
Max. AC Input/Output Apparent Power (VA)	5500	6600	8800	11000	13200
Rated AC Input/Output Current (A)	7.6/7.2	9.1/8.7	12.1/11.6	15.2/14.5	18.2/17.4
Max. AC Input/Output Current (A)	8.4/8	10/9.6	13.4/12.8	16.7/15.9	20/19.1
Max. Continuous AC Passthrough (grid to load) (A)	45				
Peak Power (off-grid) (W)	2 times of rated power, 10s				
Power Factor Adjustment Range	0.8 leading to 0.8 lagging				
Rated Input/Output Voltage/Range (V)	220/380V, 230/400V 0.85Un-1.1Un				
Rated Input/Output Grid Frequency/Range(Hz)	50/45-55, 60/55-65				
Grid Connection Form	3L+N+PE				
Total Current Harmonic Distortion THDi	<3% (of nominal power)				
DC Injection Current	<0.5% In				
Efficiency					
Max. Efficiency	97.6%				
Euro Efficiency	97.0%				
MPPT Efficiency	>99%				
Equipment Protection					
Integrated	DC Polarity Reverse Connection Protection, AC Output Overcurrent Protection, Thermal Protection, AC Output Overvoltage Protection, AC Output Short Circuit Protection, DC Component Monitoring, Overvoltage Load Drop Protection, Ground Fault Current Monitoring, Arc Fault Circuit Interrupter (optional), Power Network Monitoring, Island Protection Monitoring, Earth Fault Detection, DC Input Switch, DC Terminal Insulation Impedance Monitoring, Residual Current (RCD) Detection, Surge protection level				
Surge Protection Level	TYPE II(DC), TYPE II(AC)				
Interface					
Communication Interface	RS485/RS232/CAN				
Monitor Mode	GPRS/WIFI/Bluetooth/4G/LAN(optional)				
General Data					
Operating Temperature Range ()	-40 to +60°C, >45°C Derating				
Permissible Ambient Humidity	0-100%				
Permissible Altitude	2000m				
Noise (dB)	≤55				
Ingress Protection(IP) Rating	IP 65				
Inverter Topology	Non-Isolated				
Over Voltage Category	OVC II(DC), OVC III(AC)				
Cabinet Size (WxHxD mm)	422×658×254 (Excluding Connectors and Brackets)				
Weight (kg)	38				
Type of Cooling	Intelligent Air Cooling				
Warranty	5 Years/10 Years the Warranty Period Depends the Final Installation Site of Inverter, More Info Please Refer to Warranty Policy				
Grid Regulation	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G98, G99, VDE-AR-N 4105				
Safety / EMC Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				

Wall-Mounted

Energy Storage Battery



51.2V
M16S100-200BL-V₂

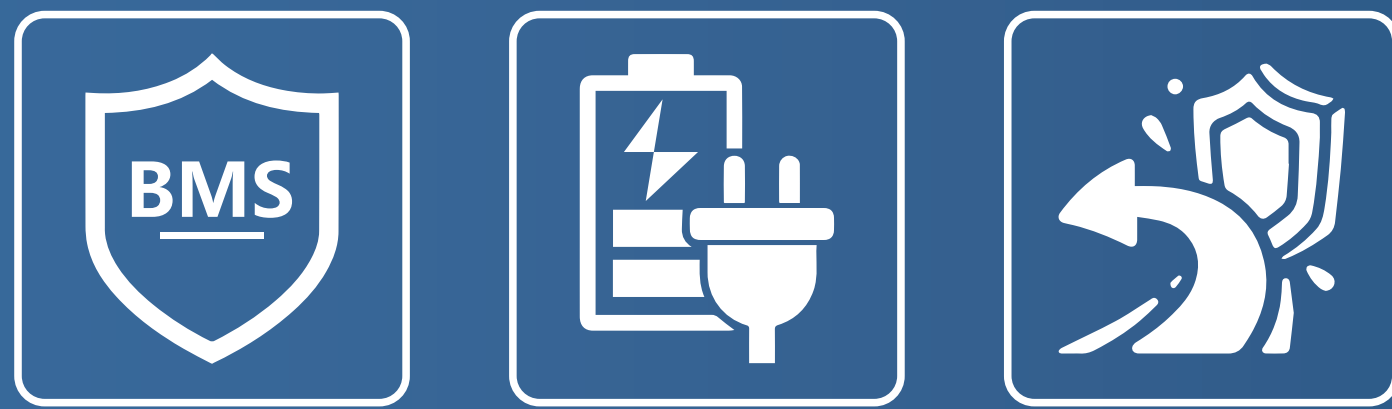

01 BATTERY FEATURES

- ◆ Original Grade A lithium iron phosphate battery cell has high safety and reliability
- ◆ The charging and discharging efficiency is high, and the number of cycles is more than 3500 times
- ◆ Compatible with most inverters on the market
- ◆ Supporting RS485 and CAN communication
- ◆ Modular design, can be expanded at any time to increase the energy of the system
- ◆ Supporting up to 15 batteries in parallel
- ◆ ON/OFF switch control output
- ◆ The LCD display monitors the operating status in real time

Product Description		
Product Model	M16S100BL-V ₂	M16S200BL-V ₂
Cells In Series	16S	16S
Rated Energy (KWh)	5.12	10.24
Rated Voltage (V)	51.2	51.2
Charging Voltage (V)	58.4	58.4
Discharge Cut-off Voltage (V)	42	42
Standard Charge Current (A)	20	40
Maximum Charging Current (A)	100	100
Maximum Discharge Current (A)	100	100
Features		
Cycle Life	≥ 3500 times @ 80% DOD, 25 °C	≥ 3500 times @ 80% DOD, 25 °C
Methods Of Communication	RS232/RS485/CAN	RS232/RS485/CAN
Charging Temperature	0~60°C	0~60°C
Discharge Temperature	-10~65°C	-10~65°C
How It Is Displayed	LCD display	LCD display
IP Protection	IP 21	IP 21
Conventional		
Product Dimensions (L×W×Hmm)	440×150×560	520×150×680
Net Weight (Kg)	44	80
Packing Dimensions (L×W×Hmm)	525×340×645	595×316×755
Gross Weight (Kg)	50	98

02 FIELDS OF APPLICATION

Wall-Mounted Energy Storage LiFePO4 Battery, and the main use areas are as follows:

- Standby power
- Home energy storage
- Machine shop
- Solar storage ...

